



Architectural Slim Wall Pack

Features

- Sealed die-casting profile for outdoor applications
- Delivers 3600lm to replace 100W MH while power consumption is 30W only
- High efficacy of 120lm/W with perfect color rendering compared to HID *
- Multiple voltage either 120-277V or 347V are optional for USA and Canada
- Available with Type III photometry
- Built-in UL class 2 driver, optional for photocell
- **UL and cUL**

* Data based on 120-277V version.



Applications

- Security, pathway and perimeter lighting
- Building entryways and walkways



Specification

Specification/Model	SWP30W27V50KDPO	SWP35W34V50KDPO
Input Power	30W	35W
Lumens output	3600lm	3600lm
Efficacy	120 lm/W	103 lm/W
CRI	72	
Color Temperature	5000K	
Input Voltage	120-277VAC	347VAC
Finish Color	Dark Bronze	
Lens	Polycarbonate (UL Recognized) (f1) Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C	
Mounting	Fits electrical box and wall mount directly	
Photocell	120-277VAC (UL listed) 3/8"-18 long threaded nipple, 3-10 second time delay, Power Consumption: less than 2W	

Ordering Guide

EXAMPLE: **SWP 30W 27V 50K D P0**

Fixture Type	Power Consumption	Input Voltage	CCT	Finish	Photocell (Option)
SWP Slim Wall Pack	30W 30Watts	27V 120-277V	40K 4000K	D Dark Bronze	P1 120V Photocell
	35W 35Watts	34V 347V	50K 5000K	B Black	P0 120-277V Photocell
					Blank Without Photocell

Note: 35W type is only available for 347V input voltage.



Ordering Information

Ordering	Rated	Luminaire	Wattage	CCT	Initial	Luminaire	Rated	CRI	Power	Dimmable	Photocell	Certificate
Code	Voltage(VAC)	Type	(W)		Lumens(lm)	Efficacy(lpw)	Life(hrs)		Factor			
SWP30W27V40KD	120-277V	Slim Wall Pack	30	4000	3400	113	50000	72	0.9	NO	NO	UL Pending
SWP30W27V40KDP1	120V	Slim Wall Pack	30	4000	3400	113	50000	72	0.9	NO	YES	UL Pending
SWP30W27V40KDPO	120-277V	Slim Wall Pack	30	4000	3400	113	50000	72	0.9	NO	YES	UL Pending
SWP30W27V50KD	120-277V	Slim Wall Pack	30	5000	3600	120	50000	72	0.9	NO	NO	UL Pending
SWP30W27V50KDP1	120V	Slim Wall Pack	30	5000	3600	120	50000	72	0.9	NO	YES	UL Pending
SWP30W27V50KDPO	120-277V	Slim Wall Pack	30	5000	3600	120	50000	72	0.9	NO	YES	UL Pending
SWP35W34V40KD	347V	Slim Wall Pack	35	4000	3400	97	50000	72	0.9	NO	NO	UL Pending
SWP35W34V40KDPO	347V	Slim Wall Pack	35	4000	3400	97	50000	72	0.9	NO	YES	UL Pending
SWP35W34V50KD	347V	Slim Wall Pack	35	5000	3600	103	50000	72	0.9	NO	NO	UL Pending
SWP35W34V50KDPO	347V	Slim Wall Pack	35	5000	3600	103	50000	72	0.9	NO	YES	UL Pending

Note: D* Dark Bronze finish color is inventory color, please consult factory for lead time if other color is needed.

Dimension

unit: inch/mm

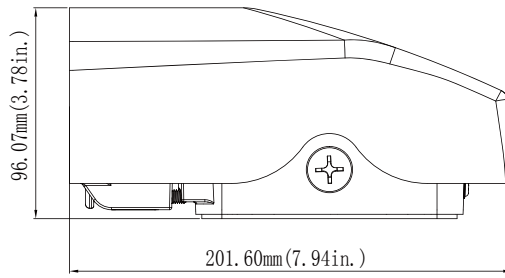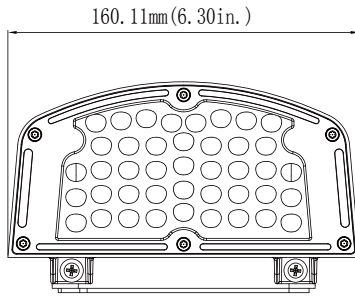


Energy Saving Replacement

MESTER MODEL	Replacing
SWP30W27VXXKYY	100W MH
SWP35W34VXXKYY	100W MH

Photometrics

SWP30W27V50KD

Luminous Intensity Distribution Curve

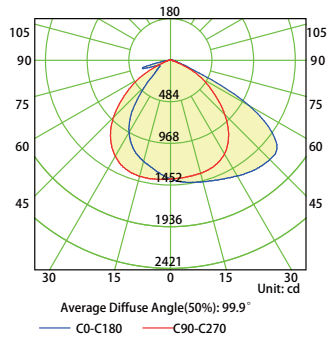

Illuminance at a Distance

